

PW1

High Performance Potwasher – 500mm x 600mm Rack

W 680mm x D 765mm x H 1835mm

The Washtech Warewashing range represents the most powerful utensil, container and tray washing units in the Washtech line up. These machines are built to increase the efficiency of many operations by promoting continuous clean up. With powerful wash pumps, large internal chambers and a range of cycle times, the savings in labour, water, chemicals and energy assure rapid payback times.


Washtech's PW1 is a front loaded warewasher suitable for washing pots, bins, trays and most bowls up to 80 litres and also a rail for hanging whisks, ladles and other utensils. The PW1 offers easy to use controls and multiple cycle times to wash a wide range of soil levels making it the perfect machine for bakeries, butcheries and food processing operations.

Standard Features

- Versatile 2, 4 and 6 minute cycles
- Double filtration system including stainless steel scrap trays and pump filters.
- Large internal chamber with usable area W 565mm x D 595mm x H 750mm
- Easy to open two piece insulated door
- Hanging rail for whisks, ladles etc
- Reliable results through robust stainless steel rinse arms with precision stainless jets
- Powerful wash pump recirculates water at nominal 800 litres per minute ensuring items are thoroughly washed.
- Easy to maintain electromechanical design
- Durable stainless steel construction
- Moffat's Comprehensive 5-2-1 Warranty
- Detergent pump fitted
- Low hot water consumption of 3.0 litres per cycle
- Fast recovery between cycles through powerful rinse heating

Includes:


- 1 x 600 70028 - 500mm dish rack
- 1 x 600 70029 - 500mm cup rack
- 1 x C660508 - cutlery basket
- 1 x K0452 - 435mm cup cover

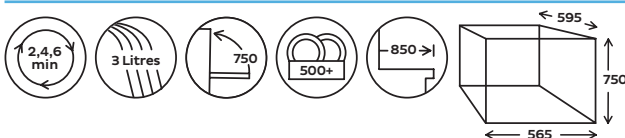

PW1

High Performance Potwasher – 500mm x 600mm Rack

W 680mm x D 765mm x H 1835mm

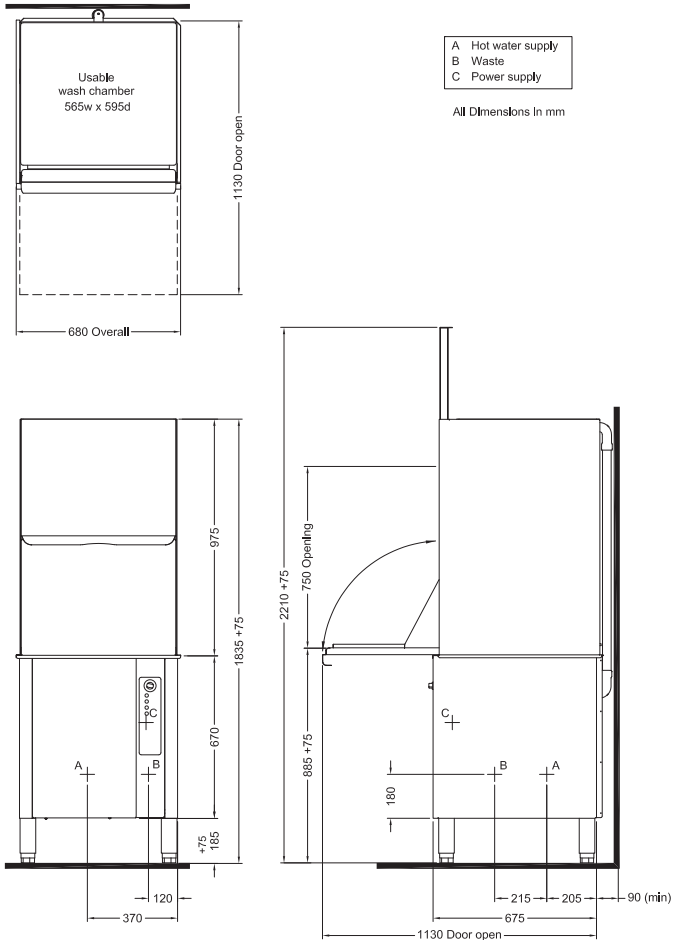

A Hot Water	Temperature	65°C
	Connection	3/4" male hose supplied
	Pressure	200-350kPa
	Flow	20 litres per min
	Quality	Potable & soft
	Backflow Prevention	Dual Check Valve (DCV)
	Consumption	3.0 litres per cycle
B Waste	Connection	1.5" BSP
	Line	2" BSP
C Electrical	Three phase	415V 50Hz 15A
	Maximum Power Consumption	
	Three phase	9.0kW
	Heating	
	Wash	2.5kW
	Rinse	5.0kW

Dimensions	Width	680mm
	Depth	765mm
	Height	1835mm
	Weight	125kg

Packed Dimensions	Width	850mm
	Depth	850mm
	Height	1790mm
	Weight	176kg
	Cubicmetres	1.29m3

Water Quality Requirements	Hardness	ppm	pH
	Min	20	7
	Max	100	8
	Ions	Cl ⁻ SO ₄ Fe Mn Cu CL ₂	
	Max mg/l	100 400 0.1 0.5 0.05 0.1	

Refer operator manual for installation instructions



moffat.com.au

Australia
Moffat Pty Limited

Victoria/Tasmania
740 Springvale Road
Mulgrave, Victoria 3170
Telephone 03-9518 3888
Facsimile 03-9518 3833
vsales@moffat.com.au
www.moffat.com.au

New South Wales
Telephone 02-8833 4111
nswsales@moffat.com.au

South Australia
Telephone 03-9518 3888
vsales@moffat.com.au

Queensland
Telephone 07-3630 8600
qldsales@moffat.com.au

Western Australia
Telephone 08-9202 6820
bgarcia@moffat.com.au

ISO9001
All Washtech products are designed and manufactured by Washtech using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Washtech reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd
Moffat / 11.16

an Ali Group Company



The Spirit of Excellence